



Cross Section: Drill Hole IDE-22-229 (Looking Northwest)

Collared 320 m from Pit Constrained Resource Estimate

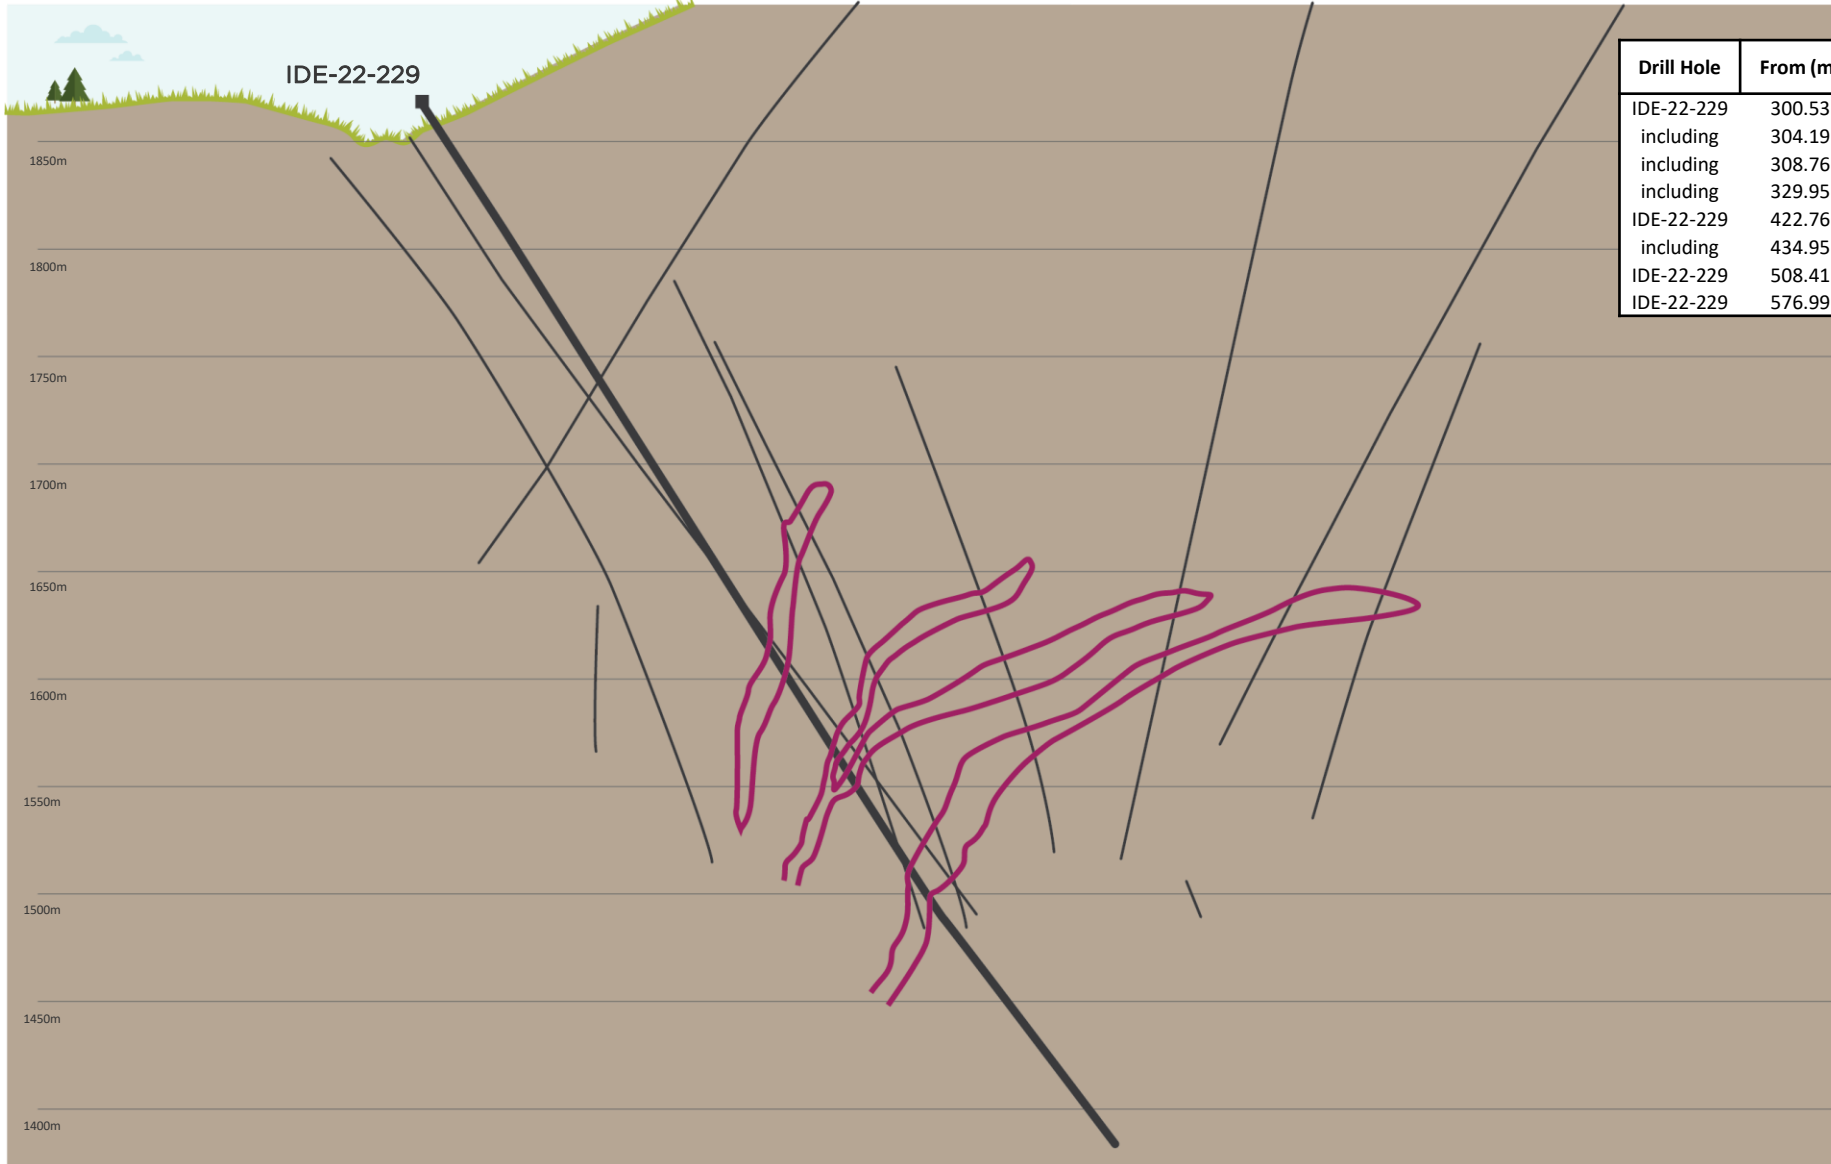

Drill Hole	From (m)	To (m)	Interval (m)	g/t Au	g/t Ag	g/t AuEq
IDE-22-229	300.53	411.79	111.26	0.43	19.75	0.68
including	304.19	309.98	5.79	1.55	227.98	4.48
including	308.76	309.98	1.22	1.80	528.00	8.60
including	329.95	332.99	3.04	2.73	49.87	3.37
IDE-22-229	422.76	460.86	38.10	0.44	13.90	0.62
including	434.95	436.47	1.52	2.23	177.00	4.51
IDE-22-229	508.41	548.03	39.62	0.38	7.05	0.47
IDE-22-229	576.99	578.21	1.22	1.31	4.46	1.37

- (1) Downhole thickness; true width varies depending on drill hole dip; most drill holes are aimed at intersecting the vein structures close to perpendicular therefore true widths are close to downhole widths (approximately 70% conversion ratio)
- (2) Gold equivalent = $g\ Au/t + (g\ Ag/t \div 77.70)$
- (3) Intervals reported are uncapped

 Vein Set Dipping Southwest

 Drill Trace