


Florida Mountain: Cross Section looking North

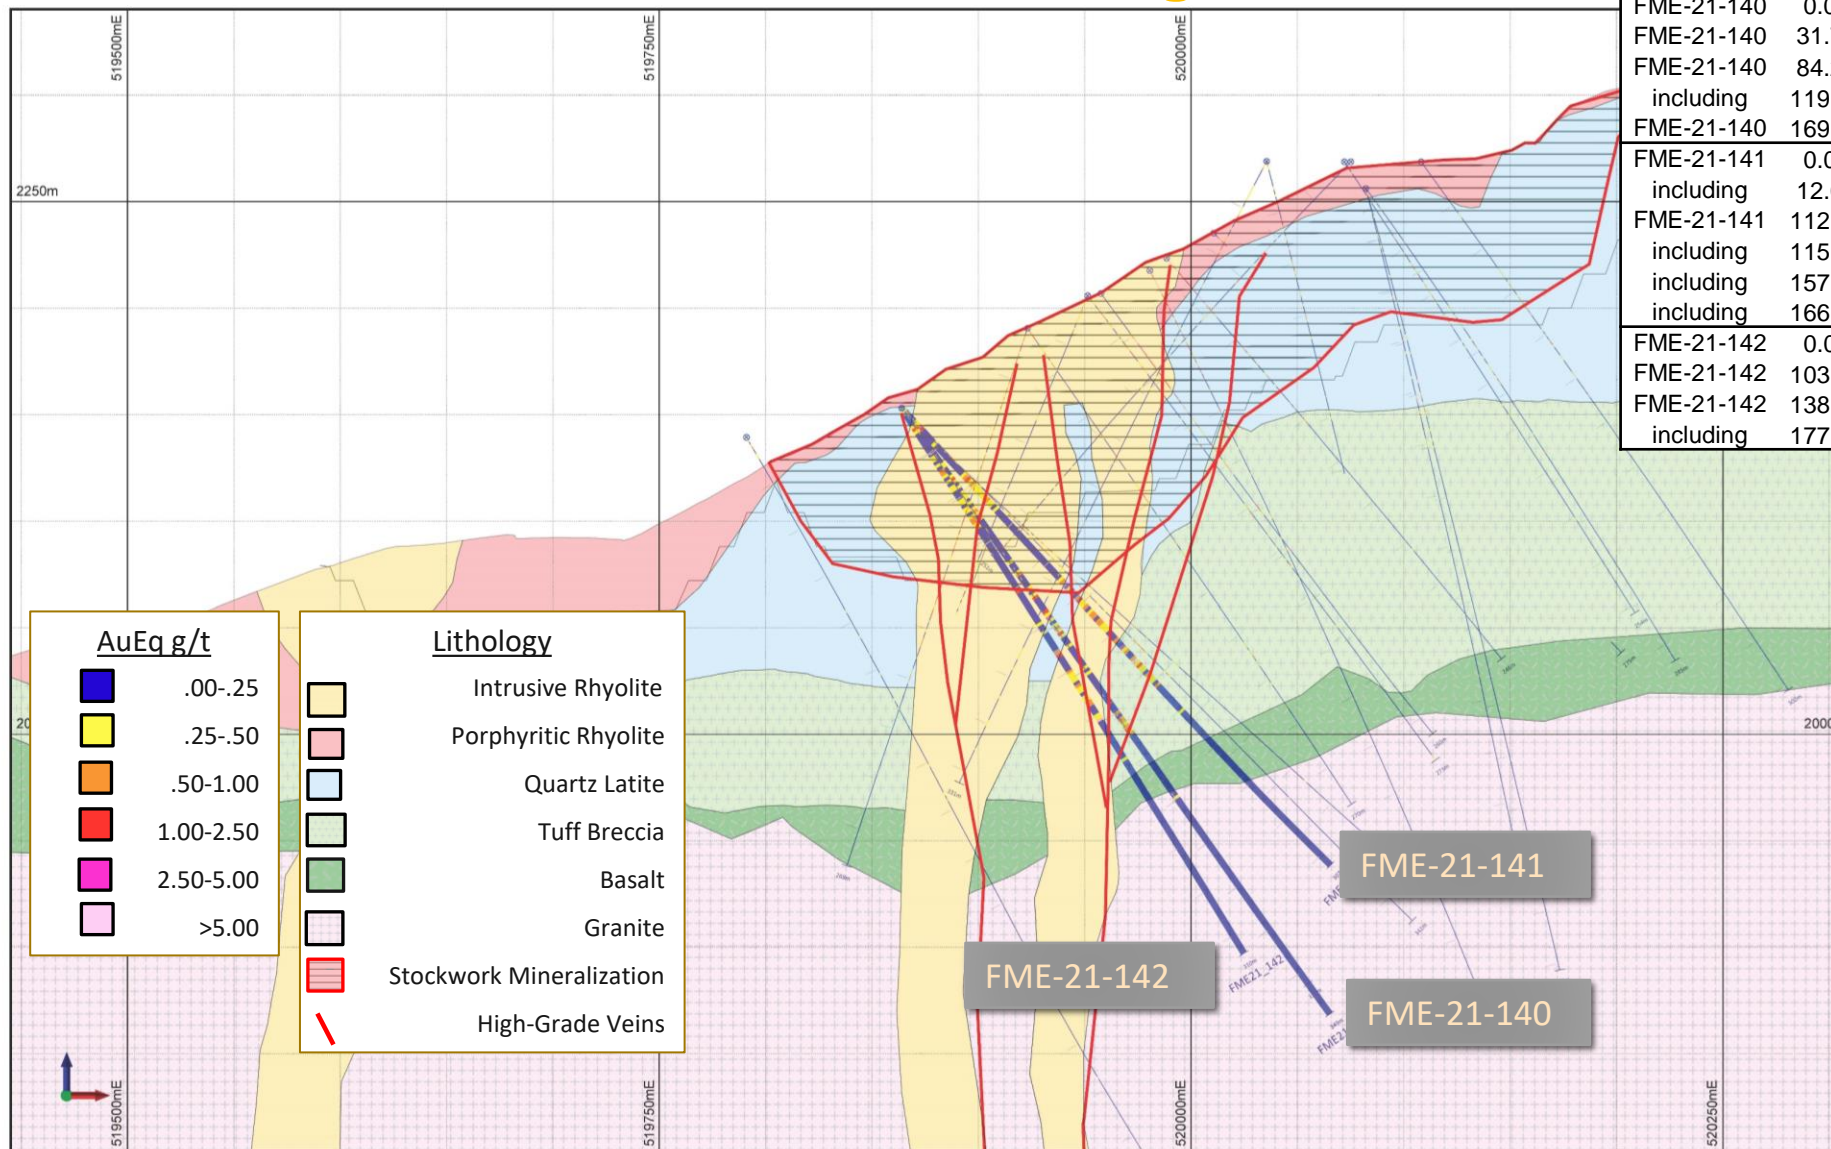

Drill Hole	From (m)	To (m)	Interval (m)	g/t Au	g/t Ag	g/t AuEq
FME-21-140	0.00	14.94	14.94	0.20	6.48	0.28
FME-21-140	31.70	64.31	32.61	0.24	6.81	0.32
FME-21-140	84.28	153.01	68.73	0.31	10.00	0.44
including	119.48	121.01	1.53	3.78	92.40	4.97
FME-21-140	169.47	187.91	18.44	0.44	11.61	0.58
FME-21-141	0.00	69.19	69.19	0.29	10.47	0.42
including	12.04	13.56	1.52	1.46	198.00	4.01
FME-21-141	112.78	185.93	73.15	0.50	41.50	1.03
including	115.82	117.35	1.53	6.42	745.00	16.01
including	157.58	159.11	1.53	1.30	147.00	3.20
including	166.73	168.25	1.52	2.04	539.00	8.98
FME-21-142	0.00	68.89	68.89	0.21	7.60	0.30
FME-21-142	103.94	105.46	1.52	2.22	2.89	2.26
FME-21-142	138.07	178.31	40.24	0.65	8.53	0.76
including	177.09	178.31	1.22	11.61	32.92	12.04

- (1) Downhole thickness: true width varies depending on drill hole dip; most drill holes are aimed at intersecting the vein structures close to perpendicular therefore true widths are close to downhole widths (approximately 70% conversion ratio)
- (2) Gold equivalent = $g \text{ Au/t} + (g \text{ Ag/t} \div 77.70)$. Rounding may cause minor discrepancies in the AuEq column.
- (3) Intervals reported are uncapped