


Florida Mountain: Cross Section looking North

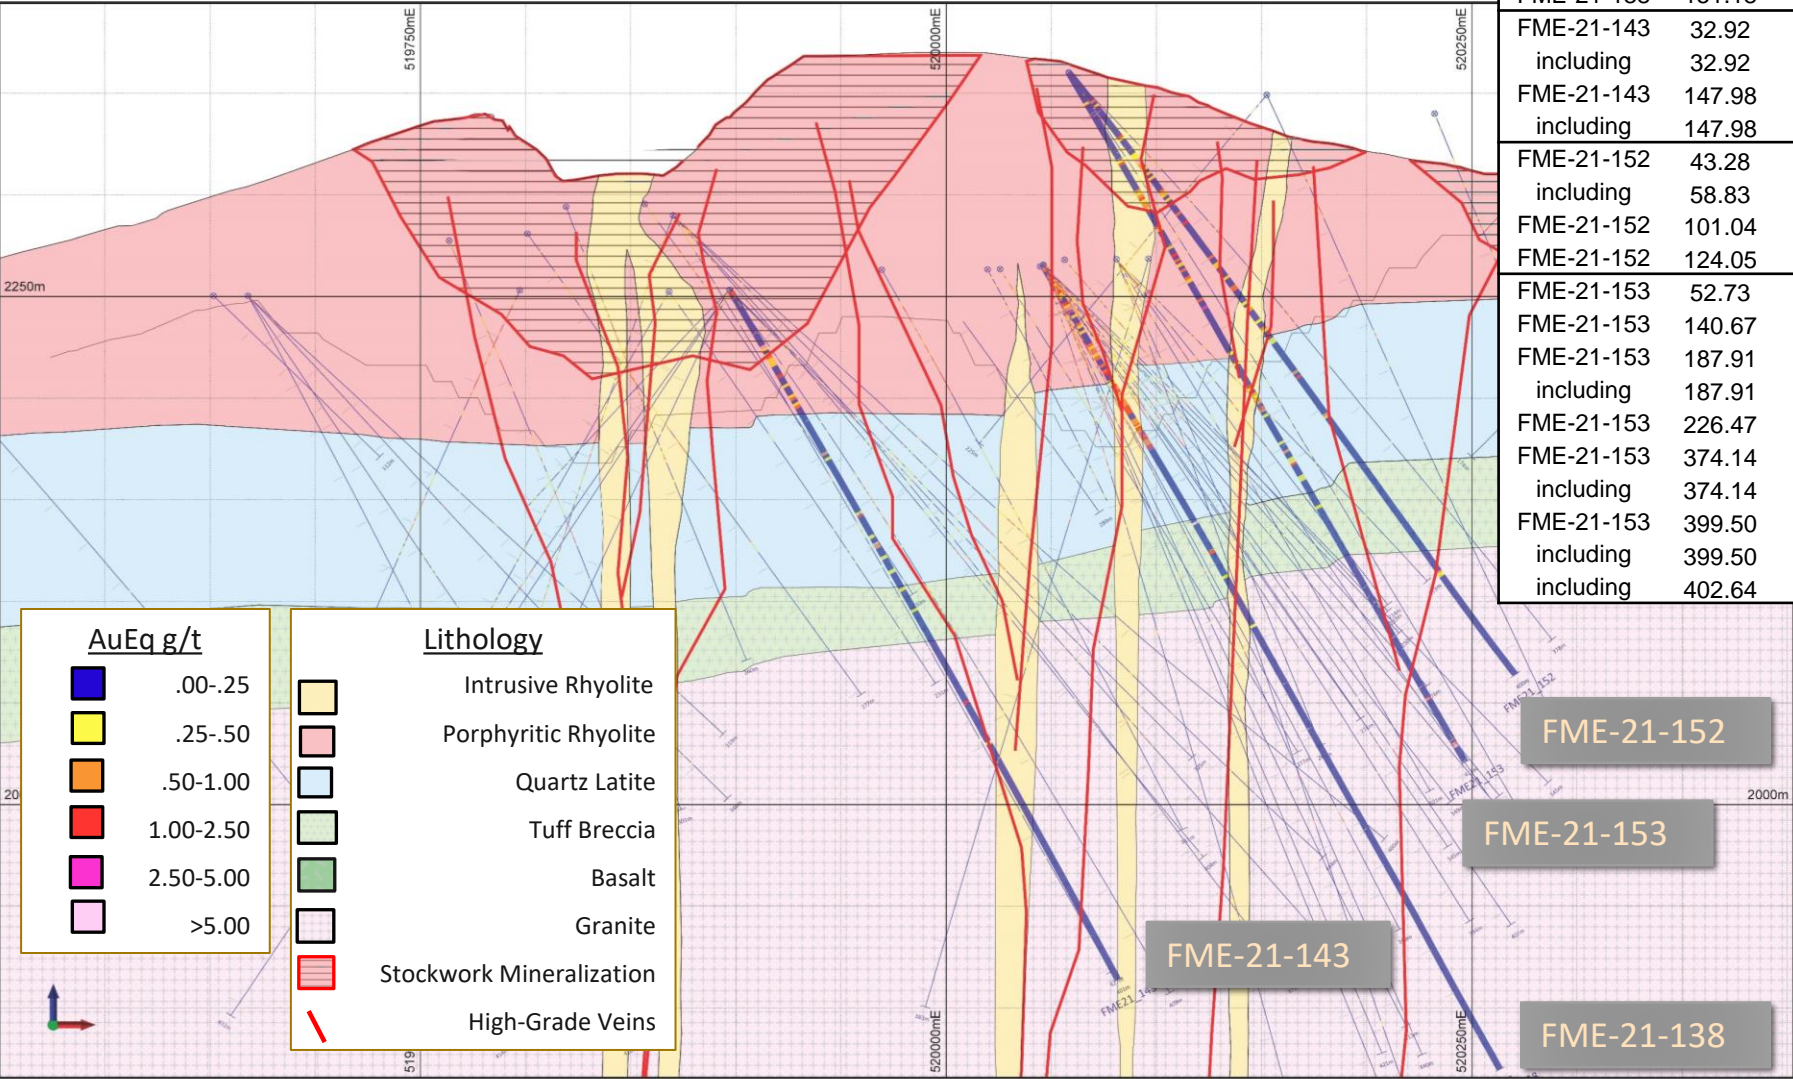

Drill Hole	From (m)	To (m)	Interval (m)	g/t Au	g/t Ag	g/t AuEq
FME-21-138	0.00	108.81	108.81	0.59	15.01	0.79
including	26.52	28.04	1.52	3.16	131.00	4.85
FME-21-138	151.18	152.55	1.37	0.87	342.00	5.27
FME-21-143	32.92	69.49	36.57	0.28	20.11	0.53
including	32.92	34.44	1.52	4.92	30.01	5.30
FME-21-143	147.98	151.18	3.20	7.53	22.99	7.83
including	147.98	148.74	0.76	29.53	92.75	30.73
FME-21-152	43.28	87.17	43.89	0.50	31.63	0.91
including	58.83	61.87	3.04	5.46	278.50	9.04
FME-21-152	101.04	102.57	1.53	0.01	145.00	1.88
FME-21-152	124.05	181.97	57.92	0.14	8.75	0.25
FME-21-153	52.73	126.34	73.61	0.14	16.15	0.34
FME-21-153	140.67	142.19	1.52	2.55	3.76	2.60
FME-21-153	187.91	208.18	20.27	0.43	17.16	0.65
including	187.91	189.59	1.68	0.87	98.13	2.13
FME-21-153	226.47	235.61	9.14	0.45	1.76	0.47
FME-21-153	374.14	375.97	1.83	0.61	136.67	2.36
including	374.14	374.90	0.76	1.29	235.00	4.31
FME-21-153	399.50	404.17	4.67	2.07	259.52	5.41
including	399.50	399.90	0.40	11.24	1148.00	26.01
including	402.64	404.17	1.53	3.24	464.00	9.21

AuEq g/t

- .00-.25
- .25-.50
- .50-1.00
- 1.00-2.50
- 2.50-5.00
- >5.00

Lithology

- Intrusive Rhyolite
- Porphyritic Rhyolite
- Quartz Latite
- Tuff Breccia
- Basalt
- Granite
- Stockwork Mineralization
- High-Grade Veins

- (1) Downhole thickness: true width varies depending on drill hole dip; most drill holes are aimed at intersecting the vein structures close to perpendicular therefore true widths are close to downhole widths (approximately 70% conversion ratio)
- (2) Gold equivalent = $g \text{ Au/t} + (g \text{ Ag/t} \div 77.70)$. Rounding may cause minor discrepancies in the AuEq column.
- (3) Intervals reported are uncapped