






# Cross Section: Drill Hole IDM-22-204 (Looking Northwest)

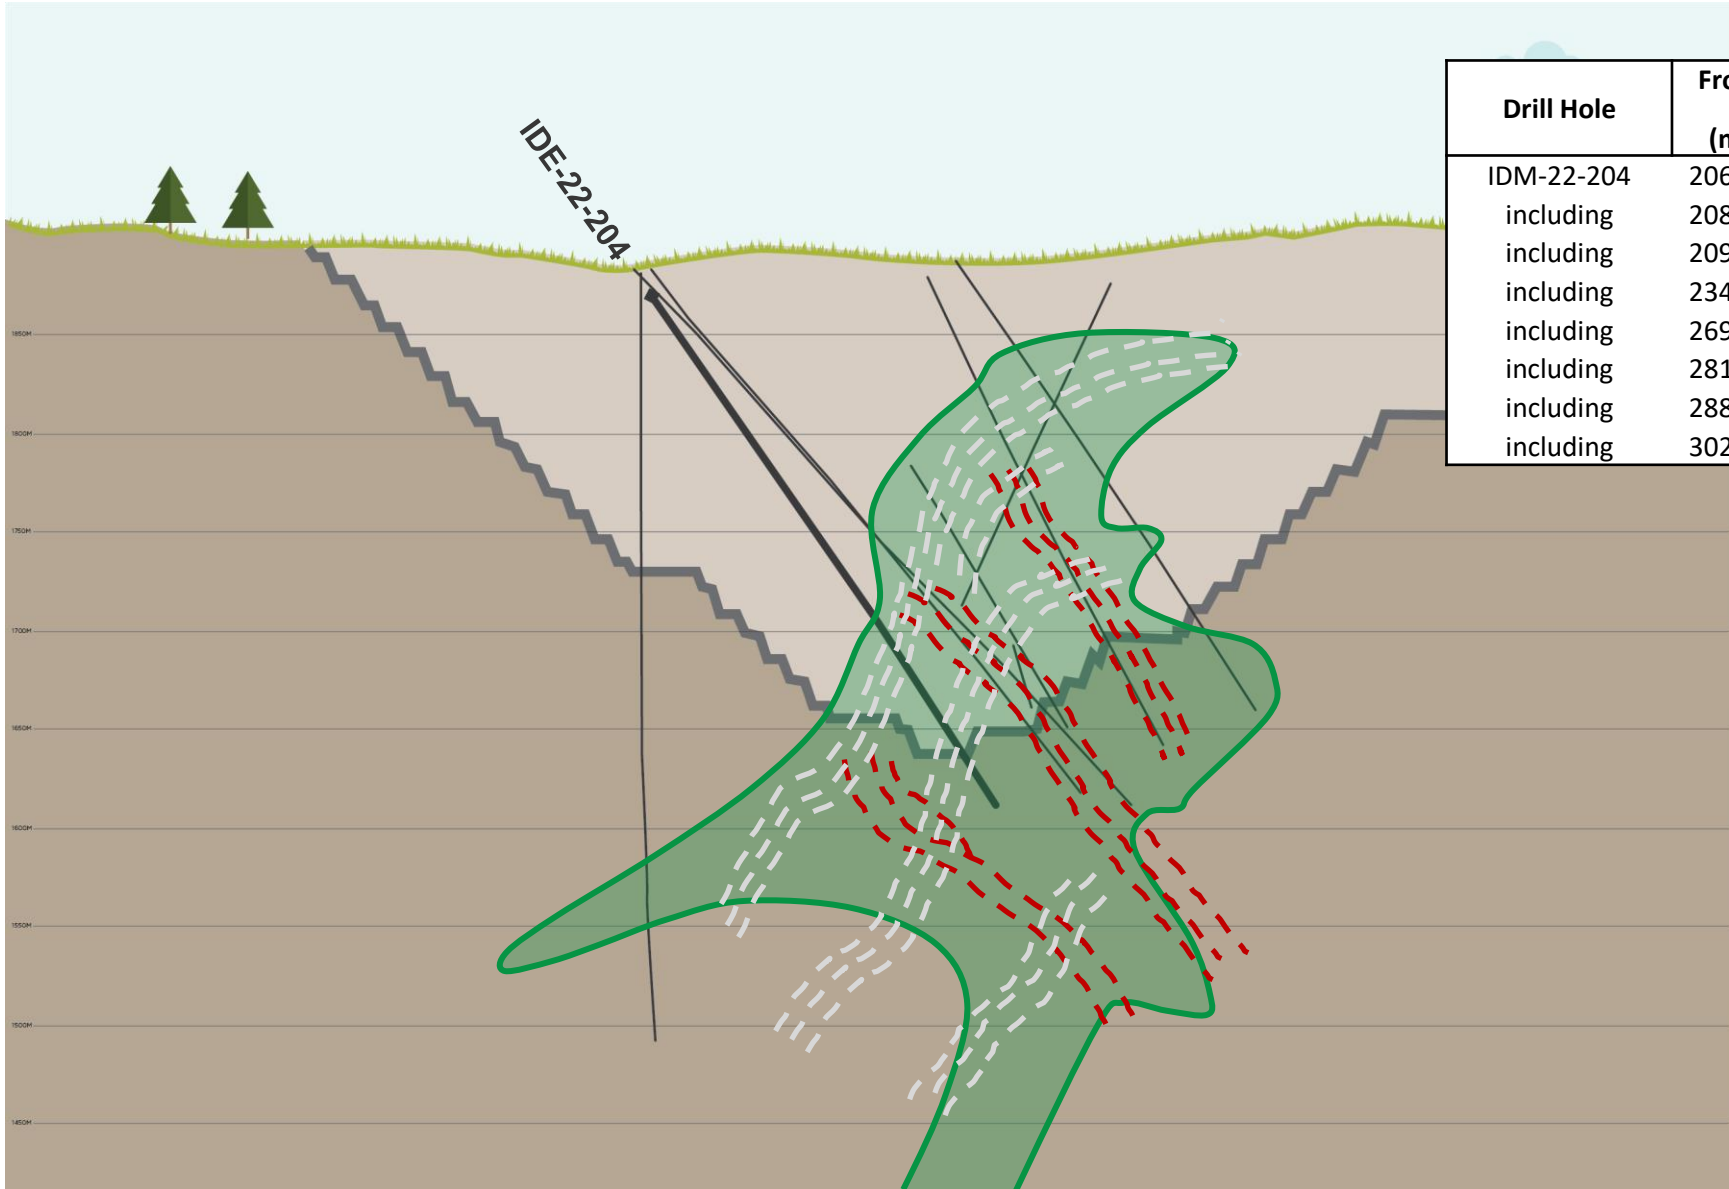

Drill Hole	From (m)	To (m)	Interval (m)	g/t Au	g/t Ag	g/t AuEq
IDM-22-204	206.65	308.76	102.11	0.57	131.29	2.26
including	208.18	214.27	6.09	0.78	875.25	12.05
including	209.70	211.23	1.53	1.30	2,718.00	36.28
including	234.09	246.28	12.19	0.46	176.01	2.73
including	269.14	275.23	6.09	1.13	180.00	3.45
including	281.33	284.38	3.05	1.07	382.00	5.99
including	288.95	292.00	3.05	1.19	132.44	2.90
including	302.67	304.19	1.52	3.16	228.00	6.09

- (1) Downhole thickness; true width varies depending on drill hole dip; most drill holes are aimed at intersecting the vein structures close to perpendicular therefore true widths are close to downhole widths (approximately 70% conversion ratio)
- (2) Gold equivalent =  $g \text{ Au/t} + (g \text{ Ag/t} \div 77.70)$
- (3) Intervals reported are uncapped

-  Vein Set Dipping Southwest
-  Vein Set Dipping Northeast
-  Low Grade Halo
-  Drill Trace