


Sullivan Gulch: Cross Section looking Northwest

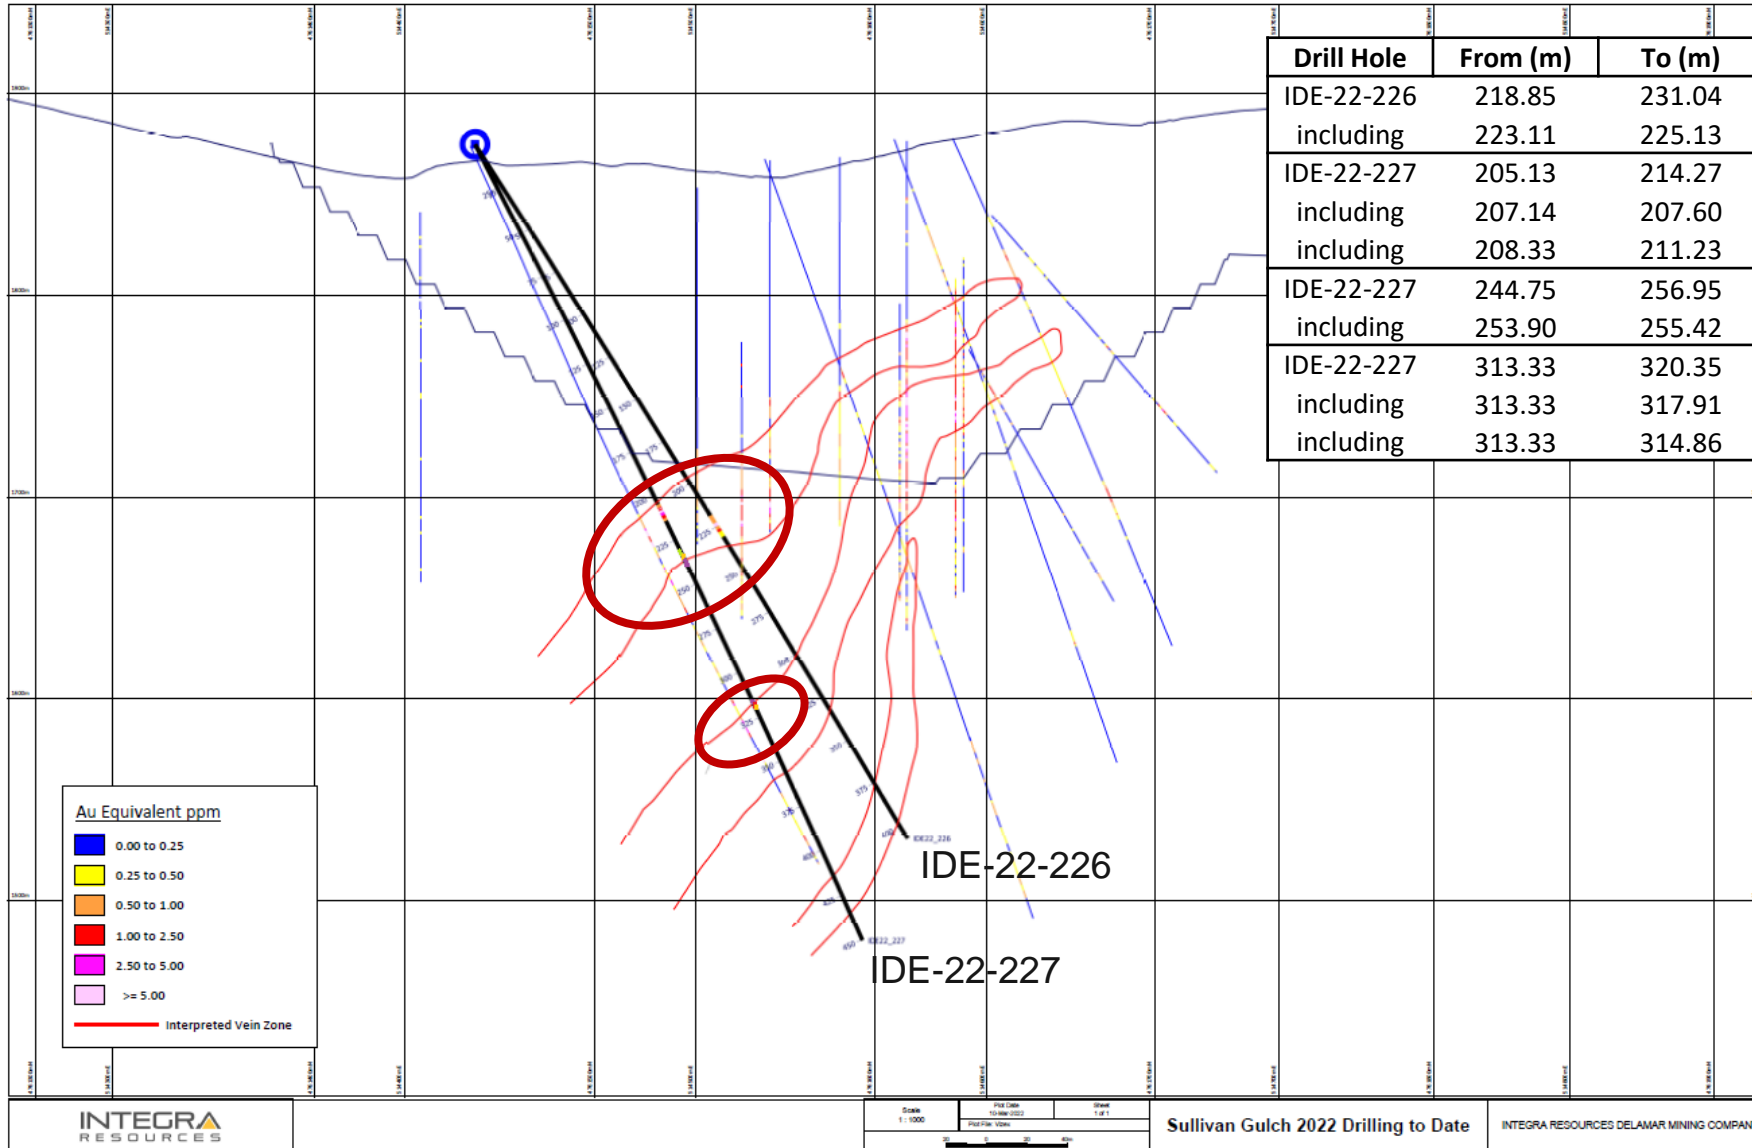

Drill Hole	From (m)	To (m)	Interval (m)	g/t Au	g/t Ag	g/t AuEq
IDE-22-226	218.85	231.04	12.19	0.54	66.42	1.40
including	223.11	225.13	2.02	0.99	293	4.76
IDE-22-227	205.13	214.27	9.14	6.76	309.38	10.75
including	207.14	207.60	0.46	104.28	4,818	166.28
including	208.33	211.23	2.90	3.55	143.55	5.40
IDE-22-227	244.75	256.95	12.20	3.71	22.73	4.01
including	253.90	255.42	1.52	25.54	88.04	26.68
IDE-22-227	313.33	320.35	7.02	4.94	269.19	8.40
including	313.33	317.91	4.58	7.06	384.86	12.01
including	313.33	314.86	1.53	16.01	779	26.04

- (1) Downhole thickness; true width varies depending on drill hole dip; most drill holes are aimed at intersecting the vein structures close to perpendicular therefore true widths are close to downhole widths (approximately 70% conversion ratio)
- (2) Gold equivalent = $g \text{ Au/t} + (g \text{ Ag/t} \div 77.70)$
- (3) Intervals reported are uncapped

Simplified cross section showing high grade results and interpreted vein zones relative to the proposed pit shell.