


War Eagle: Cross Section looking North

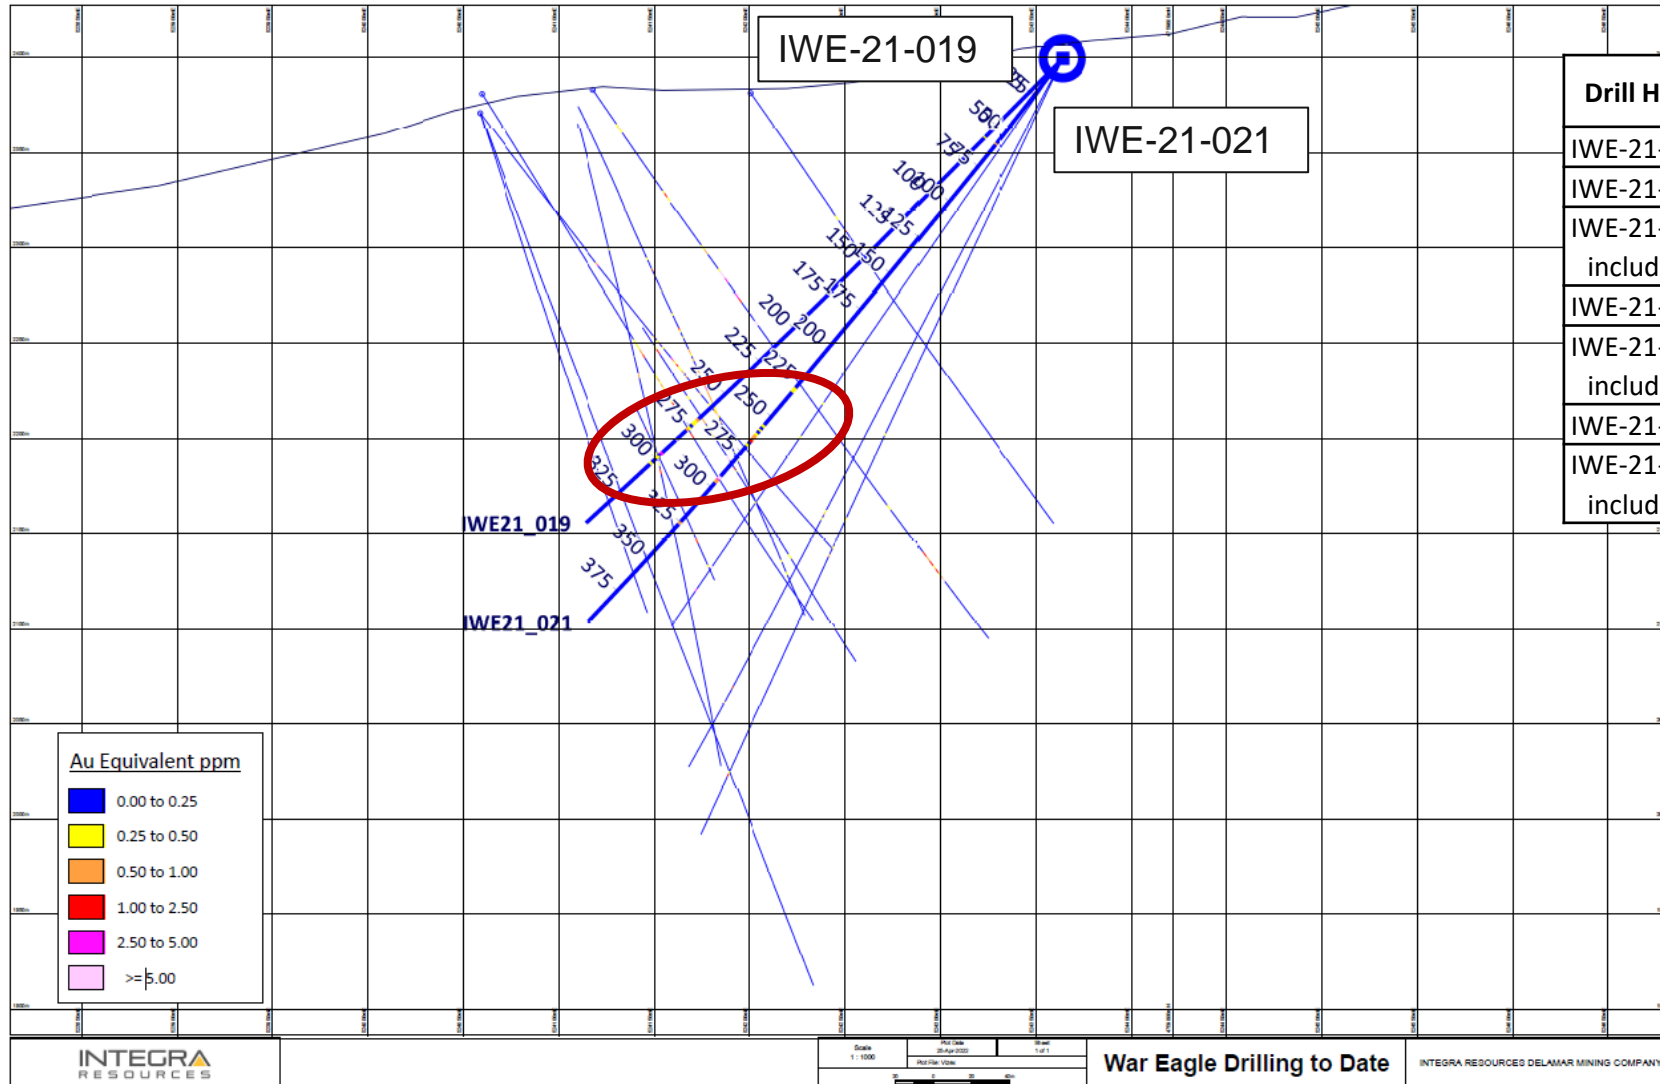

Drill Hole	From (m)	To (m)	Interval (m)	g/t Au	g/t Ag	g/t AuEq
IWE-21-019	269.14	277.98	8.84	0.27	9.77	0.39
IWE-21-019	284.84	285.51	0.67	3.51	242	6.63
IWE-21-019	295.05	304.19	9.14	0.64	1.72	0.66
including	295.05	296.57	1.52	2.86	7.59	2.96
IWE-21-021	256.03	270.97	14.94	0.45	5.26	0.52
IWE-21-021	292.3	296.88	4.58	4.04	17.17	4.26
including	292.3	294.13	1.83	9	12.63	9.16
IWE-21-021	307.24	307.64	0.4	1.64	2.66	1.67
IWE-21-021	324.61	326.44	1.83	1.71	68.87	2.6
including	326.14	326.44	0.3	8.39	315	12.44

- (1) Downhole thickness; true width varies depending on drill hole dip; most drill holes are aimed at intersecting the vein structures close to perpendicular therefore true widths are close to downhole widths (approximately 70% conversion ratio)
- (2) Gold equivalent = $g \text{ Au}/t + (g \text{ Ag}/t \div 77.70)$
- (3) Intervals reported are uncapped

Simplified cross section showing high grade results